

KAYAR

design Sottsass Associati

Smooth surface with natural fibers

Superficie liscia con fibre naturali

Surface lisse avec fibres naturelles

Glatte Oberfläche mit Naturfasern

Superficie lisa con fibras naturales

standard flooring

3,0 mm

4,8 kg/m²



T 610 × 610 mm

R 1,90 × 10 m



Classification UPEC **U₁ P₁ E_{1/2} C₁**

* Classified **C₁** if greasy substances are not used

X-Elastic acoustic flooring

5,0 mm

5,4 kg/m²



R 1,90 × 10 m



Classification UPEC **U₁ P₁ E_{1/2} C₁**

* Classified **C₁** if greasy substances are used



K 70/M



K 74/M




K 71/M




K 72/M



K 104/M

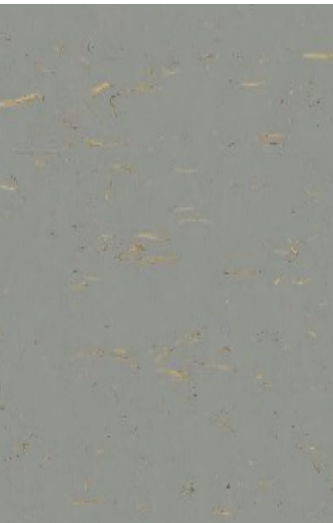

K 179/M

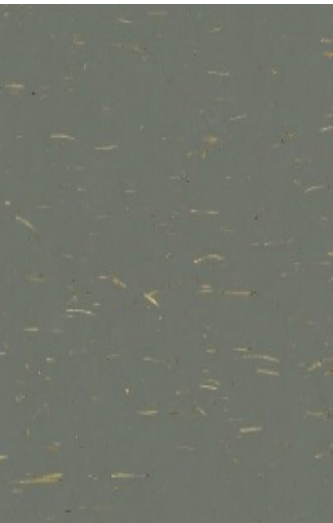

K 177/M



K 01/M




K 73/M



K 27/M



K 54/M

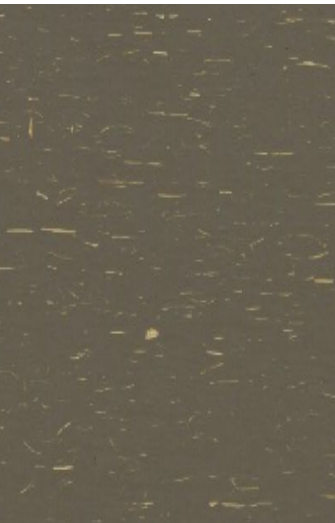

K 103/M



K 178/M



K 17/M




K 21/M




K 00/M




K 49/M

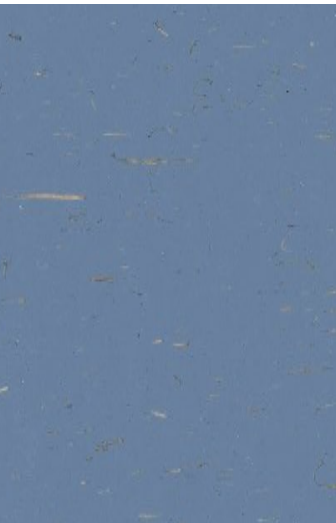

K 174/M

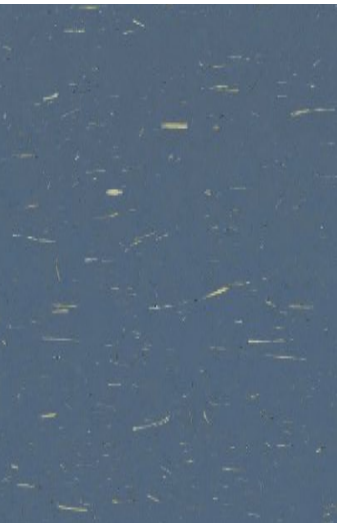

K 184/M

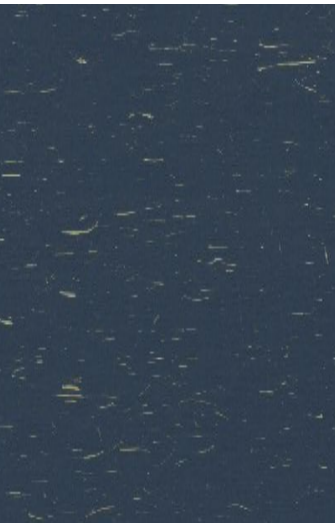

K 62/M