


Ballon de stockage PSM 300 à 5000 litres

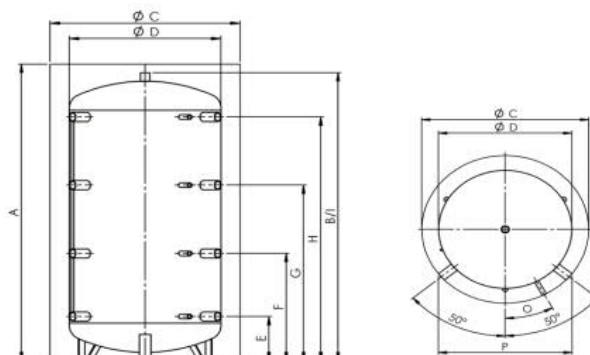

	Utilisation	Dimensions	300	500	600	800	1000	1250	1500	2000	2500	3000	4000	5000	
	Contenance brute	litres	279	480	560	718	887	1266	1500	2021	2304	2852	3759	5003	
	Cote de renversement	mm	1385	1665	1690	1740	2085	2070	2195	2420	2395	2780	2935	3035	
P	Cote de mise en place de la longueur du manchon 100 mm	mm	610	690	740	800	800	950	1000	1100	1250	1250	1400	1600	
	130 mm	mm	660	740	780	840	840	970	1010	1100	1250	1250	1400	1600	
	160 mm	mm	710	780	820	890	890	1100	1050	1130	1250	1250	1400	1600	
A	Hauteur	avec isol. – mm	1400	1680	1700	1740	2090	2060	2200	2420	2330	2770	2885	2920	
B		sans isol. – mm	1350	1630	1650	1690	2040	2010	2150	2370	2280	2720	2835	2870	
C	Diamètre	avec isol. – mm	750	850	900	990	990	1150	1200	1300	1450	1450	1600	1800	
D		sans isol. – mm	550	650	700	790	790	950	1000	1100	1250	1250	1400	1600	
E	Raccord 1*	Hauteur – mm	220	220	230	260	310	310	380	320	535	380	505	400	
		Raccord – R"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	2"	2"	2"	2"
		Capteur – R"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"
F	Raccord 2*	Hauteur – mm	470	620	610	630	745	745	825	900	975	1020	1110	1100	
		Raccord – R"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	2"	2"	2"	2"
		Capteur – R"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"
G	Raccord 3*	Hauteur – mm	800	1010	990	1030	1250	1250	1350	1490	1415	1680	1860	1810	
		Raccord – R"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	2"	2"	2"	2"
		Capteur – R"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"
H	Raccord 4*	Hauteur – mm	1120	1390	1380	1430	1710	1710	1760	2020	1855	2330	2410	2520	
		Raccord – R"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	1 ½"	2"	2"	2"	2"
		Capteur – R"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"	½"
I	Raccord haut	Hauteur – mm	1350	1630	1650	1690	2040	2010	2150	2370	2280	2720	2835	2870	
		Raccord – R"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"
O	Disposition capteur	°	18,5	23,5	28,0	28,0	28,0	32,0	33,0	34,5	36,0	36,0	37,5	39,0	
	Poids	kg	55	74	80	92	106	155	165	198	236	282	361	428	
	Réf.		PSM 300	PSM 500	PSM 600	PSM 800	PSM 1000	PSM 1250	PSM 1500	PSM 2000	PSM 2500	PSM 3000	PSM 4000	PSM 5000	
	Isolation		Non-tissé 100 mm												
	Poids	kg	17	20	23	28	35	40	43	45	50	58	64	71	
	Réf.		VPS 300 S 100	VPS 500 S 100	VPS 600 S 100	VPS 800 S 100	VPS 1000 S 100	VPS 1250 S 100	VPS 1500 S 100	VPS 2000 S 100	VPS 2500 S 100	VPS 3000 S 100	VPS 4000 S 100	VPS 5000 S 100	
	* EHS (dispositif de chauffage électrique)	jusqu'à kW	4,5	6,0	7,5	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	