


Custodial & Anti-ligature



WHARFEDALE II

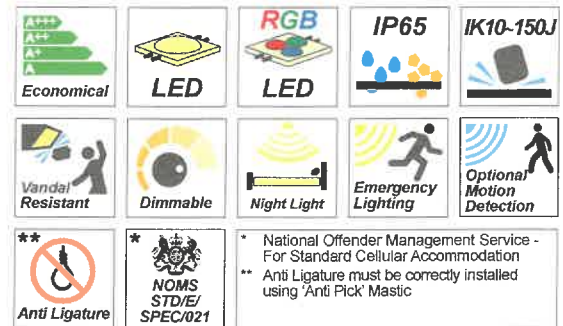

- For Standard Cellular Accommodation NOMS STD/E/SPEC/021*
- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Fully Welded Fabricated Steel & Galvanised Body Versions
- Heavy Gauge Regressed Bezel & Captive Polycarbonate Diffuser
- Removable LED Gear Tray

Linear LED Technical Information


Please refer to website for current LED technical specification

Order Code	Length		Lumens		lm/W	Colour Temp	Ra	Weight
HE	HO	mm	HE	HO	lumen/Circuit Wattage	Kelvin (K)	CRI	Kg
WFD2 1.3	2.6	600	1300lm	2600lm	115	3000K/4000K	>80	8.0
WFD2 1.9	3.9	900	1950lm	3900lm	112	3000K/4000K	>80	10.0
WFD2 2.6	5.2	1200	2600lm	5200lm	110	3000K/4000K	>80	12.0
WFD2 3.2	6.5	1500	3250lm	6500lm	108	3000K/4000K	>80	14.0

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

Ordering Options

Description	Suffix Ordering Code
Slim Body Version	/SLIM
Miniature Body Version	/MINI
Ski Slope Body Version	/SKI
60°/30° Body Version	/60°/30°
Exterior Fully Weatherproof Version	/EXT
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser	/F
Clear Stippled Diffuser	/P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT8
Fluorescent Lamp Version	/T5 or /T8 On Request

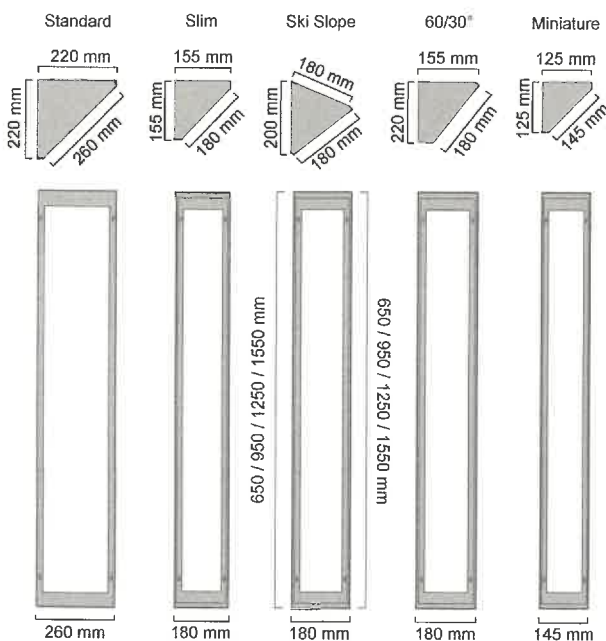


Standard Fixing Detail



- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole



TITAN 4

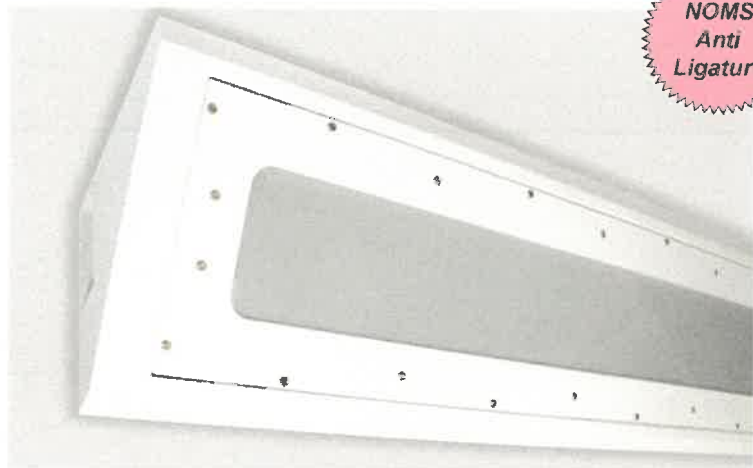


**NOMS
Anti
Ligature**

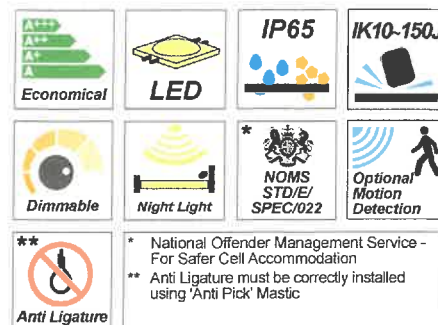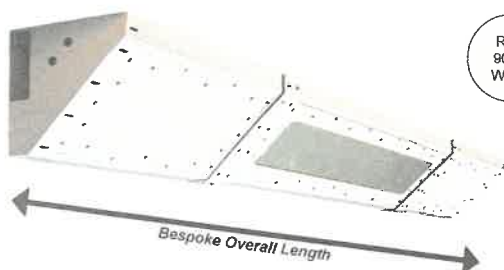

- For Safer Cell Accommodation
NOMS STD/E/SPEC/022*
- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Heavy Duty Fully Welded Steel Body
- Heavy Gauge Flush Fit GRP Frosted Bezel Diffuser
- Removable LED Gear Tray
- 3 Compartment Internal Trunking
- Optional Night Light

High specification cornice mounted luminaire manufactured to overall customer specified lengths, designed to run wall to wall or as individual fitting. Integral trunking for through wiring. Provisions for services (CCTV, Fire Alarm etc) can be integrated on request.

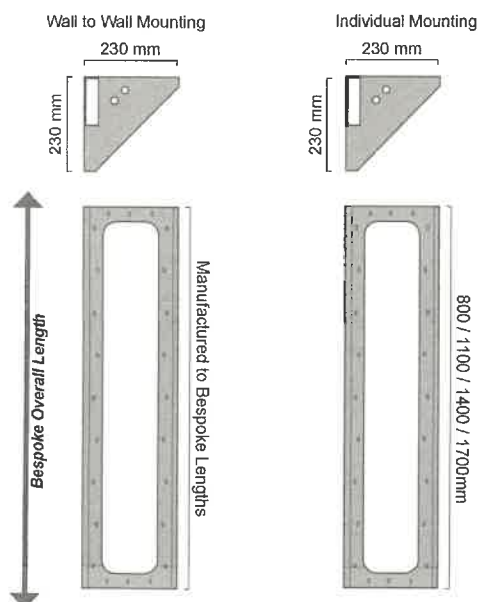

Linear LED Technical Information

Please refer to website for current LED technical specification

Order Code	Length		Lumens		lm/W	Colour Temp		Ra	Weight
	HE	HO	HE	HO		Kelvin (K)	CRI		
TTN4 1.3	2.6	800	1300lm	2600lm	115	3000K/4000K	>80	14.0	
TTN4 1.9	3.9	1100	1950lm	3900lm	112	3000K/4000K	>80	17.0	
TTN4 2.6	5.2	1400	2600lm	5200lm	110	3000K/4000K	>80	20.0	
TTN4 3.2	6.5	1700	3250lm	6500lm	108	3000K/4000K	>80	23.0	

* NOMS SAFER CELLULAR = TTN4-NOMS2.6+5.2LED-3KW/F/NL-LED-3K

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)



***RGB Colour Change LED & **Tuneable White LED options**

Ordering Options

Description	Suffix Ordering Code
Wall to Wall Mounting (Length TBC)	/WALL-TBC
Services Provision (CCTV, Fire Alarm, Air Circulation)	/SERV
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
GRP Frosted Diffuser	/GRP-F
GRP Clear Stippled Diffuser	/GRP-P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5
Fluorescent Lamp Version	/T5 or /T8 On Request



BEDHEAD SURFACE

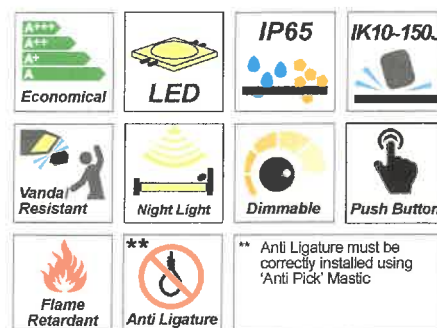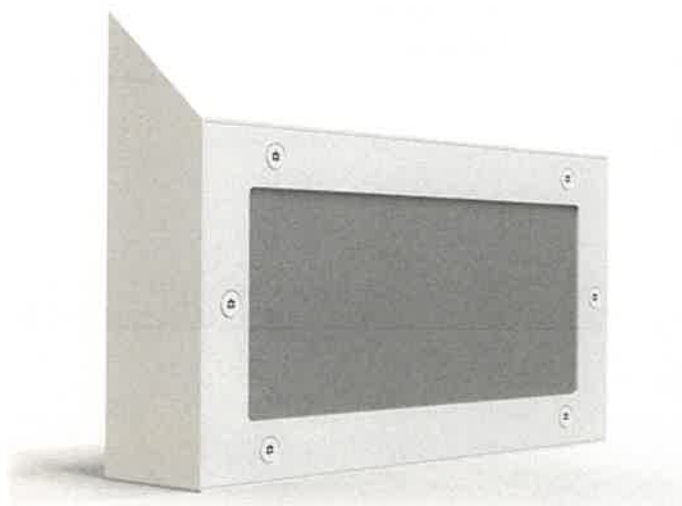

- Bedhead Surface Reading Light
- Sloping Top Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Slim 50mm Body Depth
- Two Body Dimension Version
- Optional Stainless Steel Vandal Resistant On-Off Switch
- Flame Retardant Polycarbonate Flat Panel & GRP Panel Option
- Countersunk White Stainless Steel Security Screw

Linear LED Technical Information


Please refer to website for current LED technical specification

Order Code	Length	Lumens	lm/W	Colour Temp	Ra	Weight
HE HO mm	HE HO	lumen/Circuit Wusage	Kelvin (K)	CRI	Kg	
BHS 0.5 1.0 230	500lm 1000lm	115	3000K/4000K	>80	4.5	

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

***RGB Colour Change LED & **Tuneable White LED options**

Anti Ligature

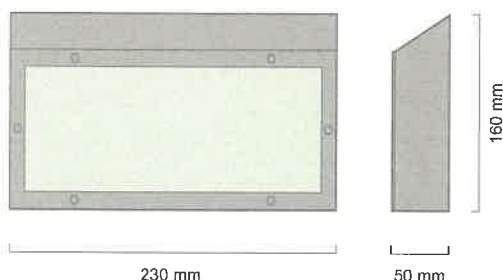

Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole

Ordering Options

Description	Suffix Ordering Code
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI /1-10v /SW-240v /CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Night Light	/NL
Stainless Steel Vandal Resistant On-Off Switch	/VRS
*RGB Colour Change LED	/RGB-LED
**Tuneable White LED	/TUNE
Frosted Flat Panel Diffuser	/FL-F
Frosted Glass Reinforced Panel (GRP)	/GRP-F
Security Driver/Key	/SD
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5
Fluorescent Lamp Version	/PL & /T5 Lamps On Request



BEDHEAD RECESSED



- Bedhead Recess Reading Light
- Flush Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Two Body Sizes
- Only 55mm Recess Depth
- Decorative Facia Options
- Frosted Polycarbonate or GRP Panel Diffuser
- Countersunk White Stainless Steel Security Screw

Linear LED Technical Information

Please refer to website for current LED technical specification



Order Code		Length	Lumens		lm/W	Colour Temp	Ra	Weight	
	HE	HO	mm	HE	HO	lumen/Circuit Wattage Kelvin (K)	CRI	Kg	
BHRS	1.0	2.3	300	1000lm	2300lm	115	3000K/4000K	>80	8.0
BHRL	1.3	2.6	600	1300lm	2600lm	112	3000K/4000K	>80	12.0

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

***RGB Colour Change LED & **Tuneable White LED options**

Ordering Options

Description	Suffix Ordering Code
Small Body Version	/BHRS
Large Body Version	/BHRL
Exterior Fully Weatherproof IP65 Version	/EXT
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI /1-10v /SW-240v /CORR
Integral 3hr Emergency or 3hr Self Test (Large Only)	/EM3 or /EM3-SELF
Night Light	/NL
Stainless Steel Vandal Resistant On-Off Switch	/VRS
*RGB Colour Change LED	/RGB-LED
**Tuneable White LED	/TUNE
Frosted Flat Panel Diffuser	/FL-F
Frosted Glass Reinforced Panel (GRP)	/GRP-F
Security Driver/Key	/SD
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5
Fluorescent Lamp Version	/PL & /T5 Lamps On Request

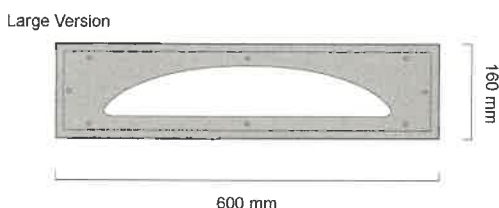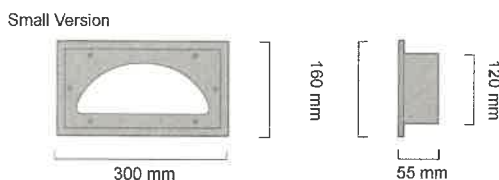

Recess Cut Out Dimensions	Recess Flange Dimensions
Small 270mm x 130mm	300mm x 160mm
Large 570mm x 130mm	600mm x 160mm

Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole