


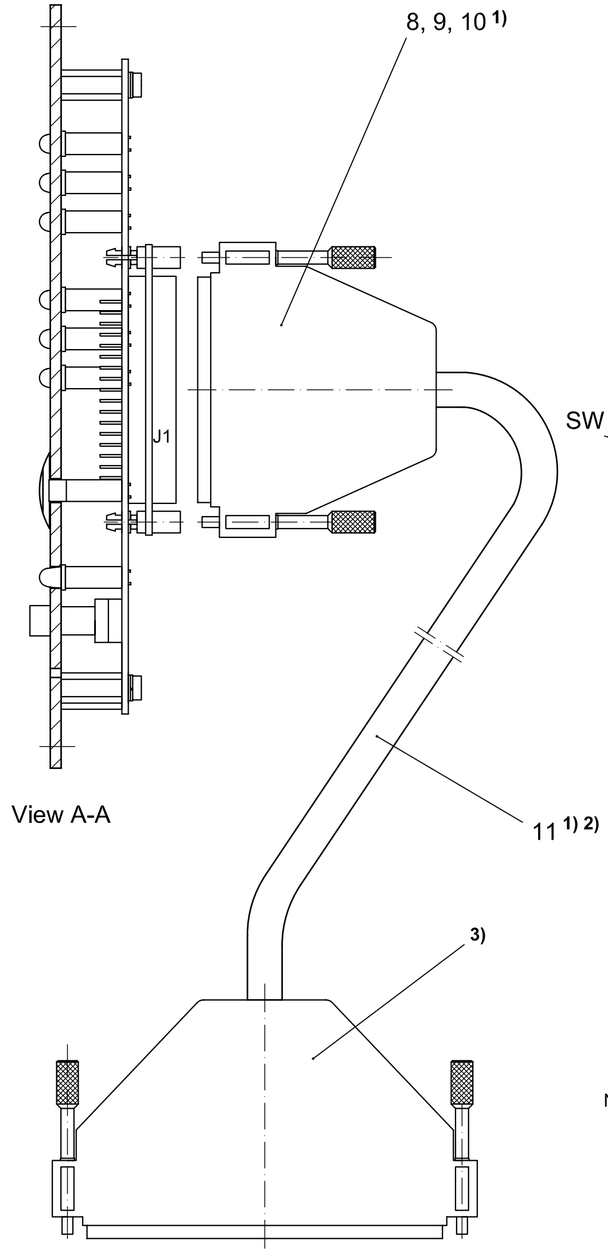


View A-A

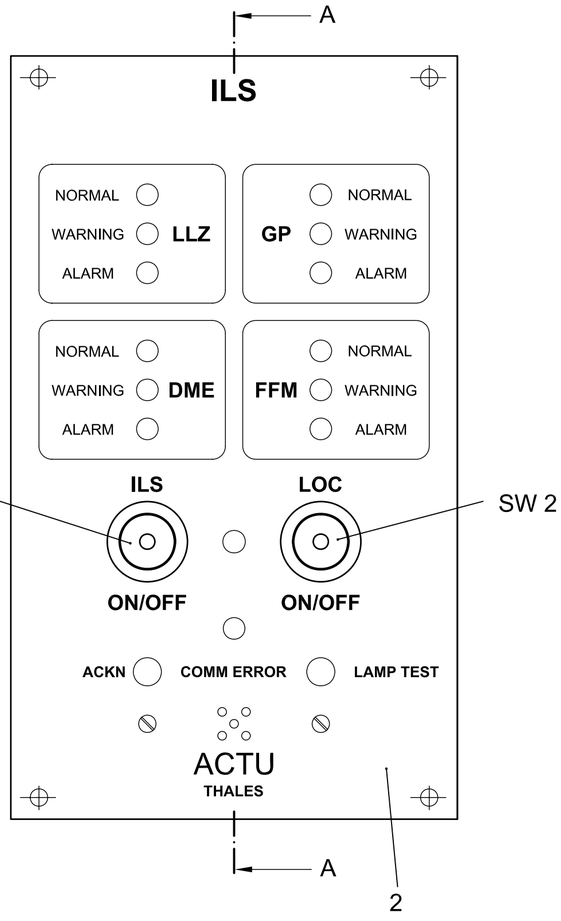

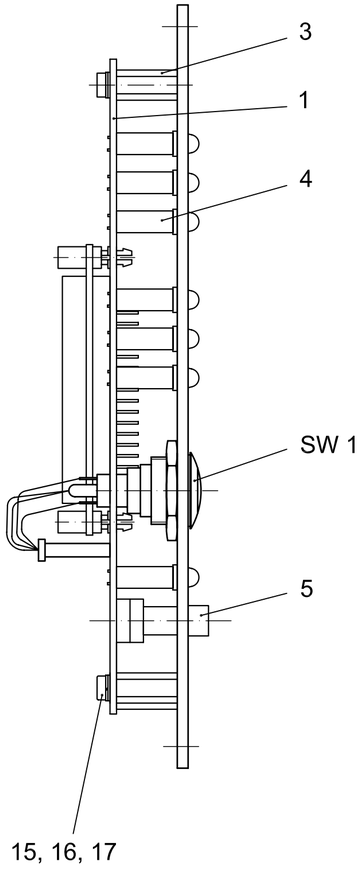

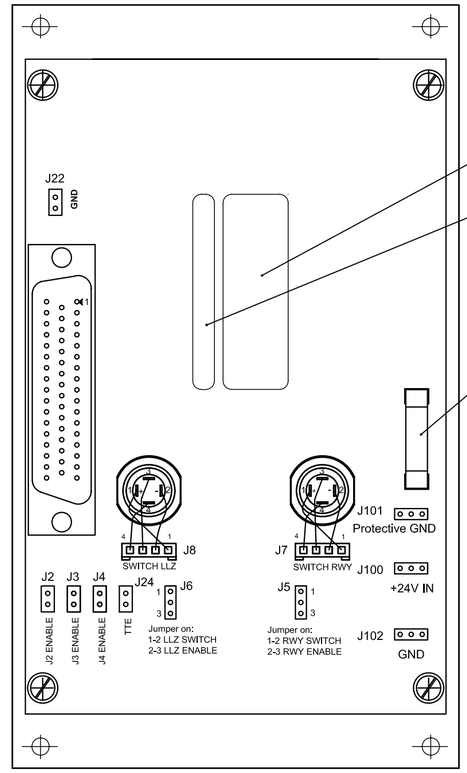


Note:
1) Part Pos. 8, 9, 10 and 11 will be delivered separate!
2) Pos. 11, Cable (P/N....) length will be defined by Project Engineering!
3) OIO Connector will be delivered with the RCSE 443 DTI, P/N 83011 38571!


Passing on and copying of this document, use and communication of its contents is not permitted without written authorization. All rights reserved. © Thales ATM GmbH

150 mm


A	29.11.	ECN03495	UNG	General Tolerances DIN ISO 2768 m	Material	Finish	
ED	Date	Status	Name		ACTU, DTI TOP LEVEL		
				2007 Date Name			
				Appra. Author 29.11. Unger	FZ 83011 38590	Z45H	Page 1/2
				Originator 29.11. Seitter			
				Department PD NAV/ENG	THALES		Scale 1:1

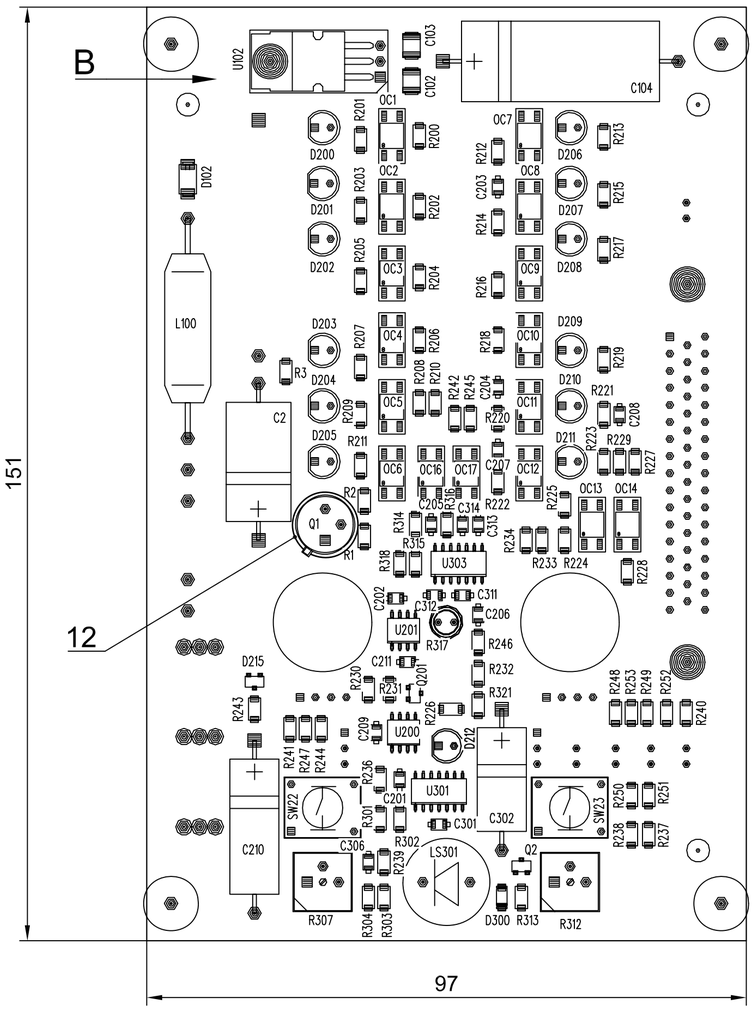


Component side

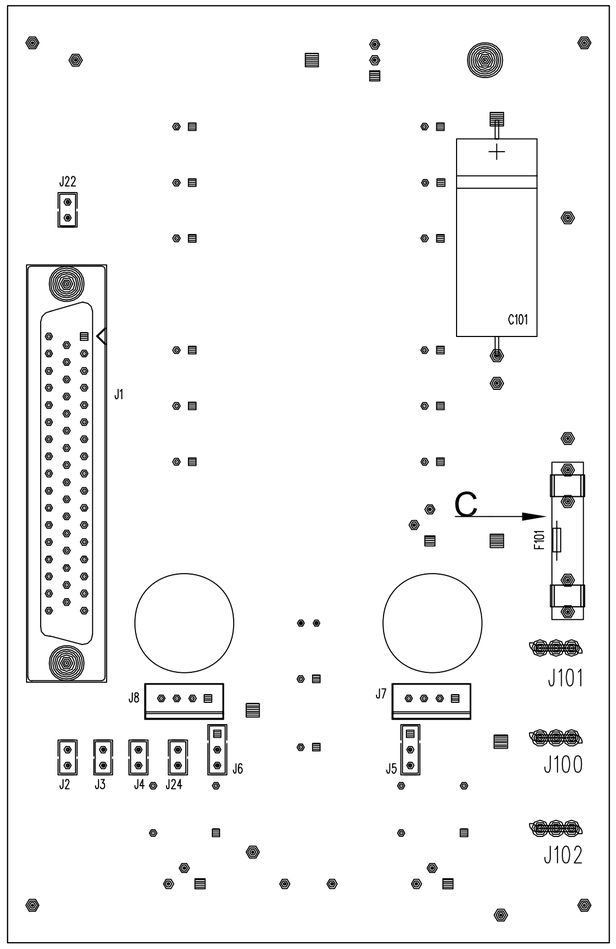

Solder side

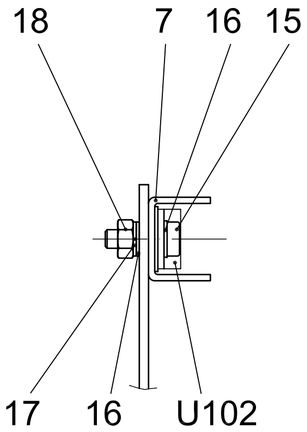

View B



View C

Note:

- Components D200 to D212 and R317 must be assembled with distance holder Pos. 4 !
- Pos. 12 isolation plate must be assembled under component Q1 !

Passing on and copying of this document, use and communication of its contents is not permitted without written authorization.
All rights reserved. © Thales ATM GmbH

150 mm

					Material		Finish
				General Tolerances DIN ISO 2768 m	ACTU, DTI TOP LEVEL		
				2007	Date	Name	
				Appra, Author	29.11.	Unger	
				Originator	29.11.	Seitter	
				Department	PD NAV/ENG		
A	29.11.	ECN03495	UNG	THALES	FZ	83011 38590	Z45H
ED	Date	Status	Name				

Page 2/2

Scale 1,5:1

A2